



T-Adapter SDC-1A-1A1U-50-50-52


T-ADAPTER SDC-1A-1A1U-50-50-52

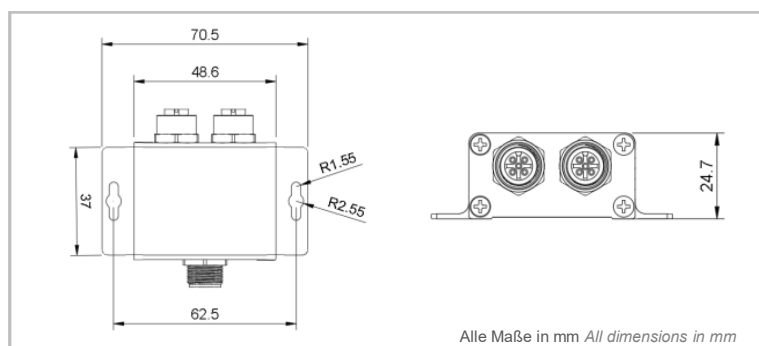

Stecker M12, 5-polig Connector M12, 5-pole

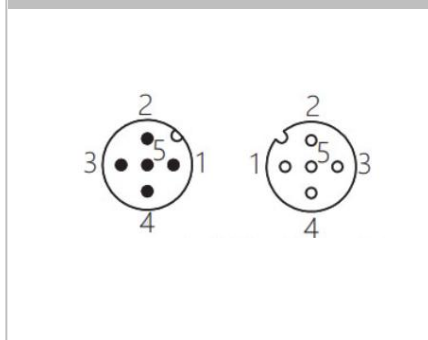

Anschlussbelegung Connection diagram

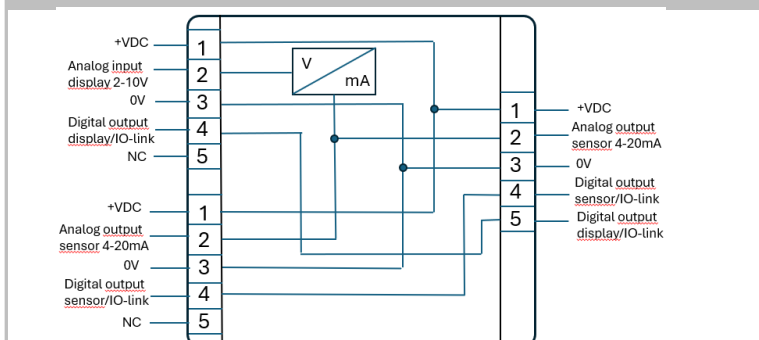

If Pin 2 will not be connected to an analog interface, Pin2 must be connected to ground

Technische Daten bei 24 V DC und 20 °C Technical data at 24 V DC and 20 °C

Versorgungsspannung	Supply Voltage	24V $\pm$ 20%
Gehäusematerial	Housing material	Aluminum black anodized
Betriebstemperatur	Operating temperature	-25...+50 °C
Lagertemperatur	Storage temperature	-40...+70 °C
Schutzart (oder Schutzgrad)	Degree of Protection	IP65
Verbindung	Connection	3 x M12-5pin
Zulassungen	Approvals	CE

